



Pressure Reducing Valve

Description

The Dorot Series 300 Pressure-Reducing Valve ('S300-PR'), is activated by the pressure of the pipeline. The valve reduces high upstream pressure to a steady, pre-determined and lower downstream pressure, regardless of fluctuations in upstream- pressure or rate of flow. In case the downstream-pressure exceeds the set value, the valve will close drip-tight.

Where to use it

- In pressure management applications in water supply systems used in mining
- In treatment plants (AWTP, EWTP, etc.)
- In leaching applications for Copper, Gold, Uranium & Lithium mines
- In underground mining for pressure control at levels (and as the main component of Aquestia Underground SKIDS ®)

Features and Benefits

Superb performance	• Regulates at a stable mode, regardless of valve-size, down to near-zero flow. Thus, eliminating the need for a special low flow plug-design (such as 'U/V-port') or a bypass valve. • 'Floating', low-friction internal-trim design, guided by a unique LPT® device.
Reduced periodic inspection / maintenance labor	• The control-trim is fitted with a HIGH-CAPACITY control-filter suitable for industrial applications. • Easy in-situ adjustment and maintenance.
High reliability	• All control ports are fitted with SST sleeves for preventing corrosion-blockage. • High Kv (Cv) control loop accessories for clogging prevention. • Pre-shaped reinforced diaphragm – for easier assembly and improved longevity.
Versatility	• A standard and simple single-chamber valve design, provides smooth operation. • Conversion to a double chamber is a simple and economical option.

Pressure Reducing Valve

Technical Specifications

Size Range	1½"/40mm - 40"/1000mm – Flanged 1½"/40mm - 6"/150mm - Grooved 1½"/ 40mm - 2"/50mm – Threaded
Working Pressure	Maximum: 16 bar (250 psi) / 25 bar (360 psi) Minimum: 0.3 bar (5 psi)
Testing Pressure	1.5 times maximum working pressure
Materials	Body: Ductile Iron (standard); Cast Steel, Stainless Steel, Super Duplex (optional) Elastomers: EPDM (standard), Viton (optional)

Upon ordering, please specify size, working pressure, thread/flange standard and type of fluid


Quick Sizing

- Valve sized to be the same as line-size or one nominal-size smaller.
- Maximum recommended flow velocity for continuous operation 5.5 m/sec (18 ft/sec)

Main Control System Components*

1. Main Valve
2. Ball Valve
3. Self-flushing Filter
4. 2W PR Pilot Valve
5. Pressure Gauge

* Indicative drawing

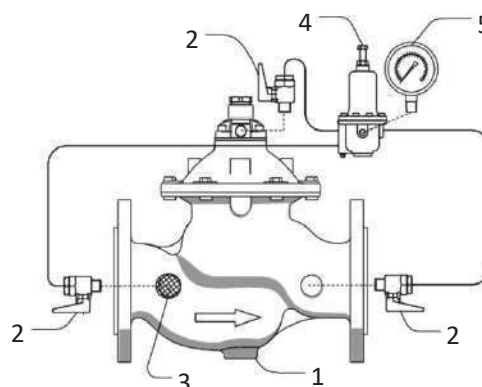

Typical Installation

